


series

LD112

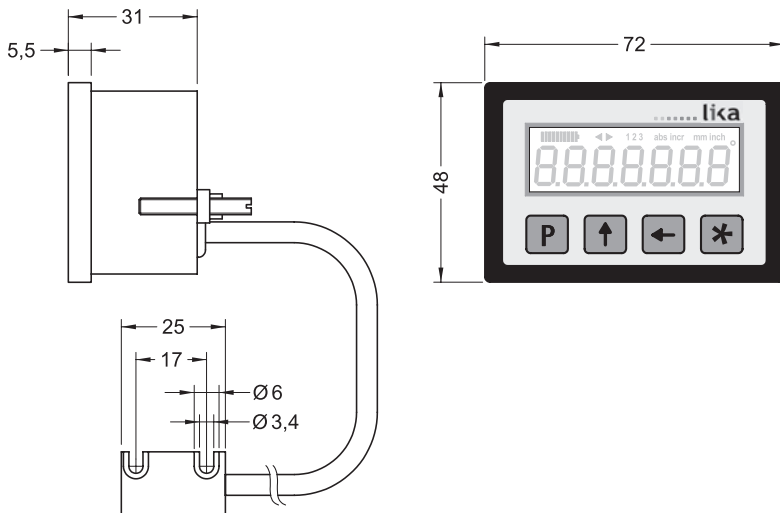

LD112

- Quasi-absolute battery powered display
- Compact housing
- Connected sensor
- Linear and angular display mode
- Resolution up to 0.01 mm

### PARAMETERS

3 Offset values, preset, resolution, mm/inch, angular display mode

### ENVIRONMENTAL SPECIFICATIONS

Operating temperature range: 0°C ÷ +50°C (+32°F, +122°F)  
 Storage temperature range: -20°C ÷ +80°C (-4°F, +176°F)  
 Protection: IP60 front, IP40 back

### MECHANICAL SPECIFICATIONS

Dimensions: 72 x 48 x 31 mm  
 Cut out: 68 x 33 mm<sup>2</sup>  
 Cable length: 5 m max.  
 Display: LCD (-999999 ÷ 999999)

### ELECTRICAL SPECIFICATIONS

Power supply: 2 batteries 1,5 V  
 Consumption: ~ 220 µA  
 Measurement speed: < 5 m/s max.

### ACCESSORIES

MT25: Magnetic tape

### ORDERING CODE

